

Focus on high-end outdoor solar street light factory

- ◆ ADC12 die-casting one-piece heat sink, waterproof IP65.
- ◆ Direct light design, high light transmittance PC lens, light transmittance above 90%, chip brightness 200LM/W.
- ◆ No wiring required, easy installation, adjustable folding, replaceable battery compartment design.



IP65

LM-80




YL-232 Series
Solar Street Light
All-in-one




ITEM	PICTURE	MATERIAL	POWER	BARKET	BODY SIZE	SOLAR PANEL	WEIGHT	PACKING SIZE
1		Alum inum +pc	15W	▣ 60m m	552*282*130	500*279 25W/5V	3.5	570*350*235 (2pcs)
2		Alum inum +pc	25W	▣ 60m m	657*325*130	605*323 35W/5V	4.5	670*395*235 (2pcs)
3		Alum inum +pc	40W	▣ 60m m	860*350*130	842*341MM 50W/5V	5.9	910*410*280 (2pcs)
4		Alum inum +pc	60W	▣ 60m m	887*400*280	885*398MM 60W/6V	10.3	1035*450*115 (1pcs)
5		Alum inum +pc	80W	φ 60m m /φ 76m m	1160*400*280	1157*398MM 80W/6V	11.95	1310*450*115 (1pcs)
6		Alum inum +pc	100W	φ 60m m /φ 76m m	1435*400*280	1434*398MM 100W/6V	15.2	1585*450*115 (1pcs)

Product Size =


Power	Light effect	LED lamp bead;	Monocrystalline solar panels	Solar panel size
30W	200LM/W	Philips 5050~150PCS	'60W	887*400*280mm

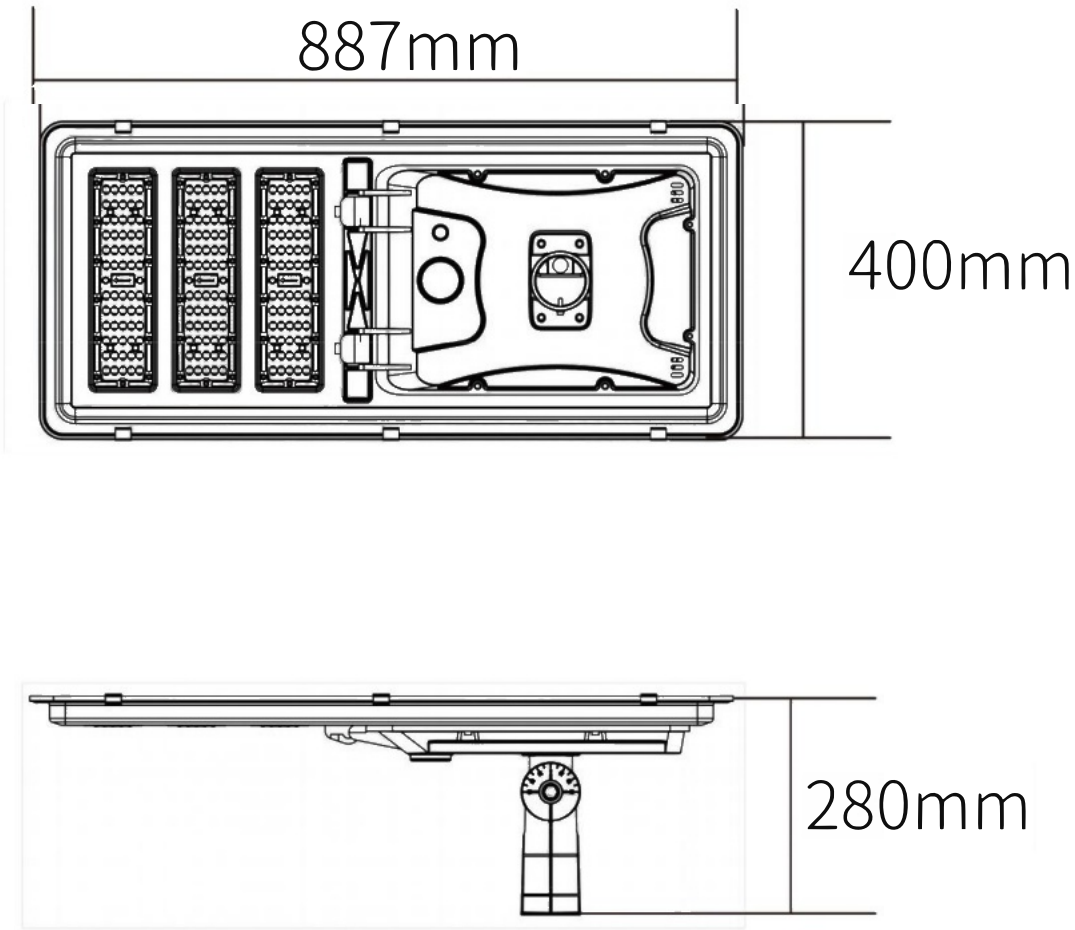

Exploded View —

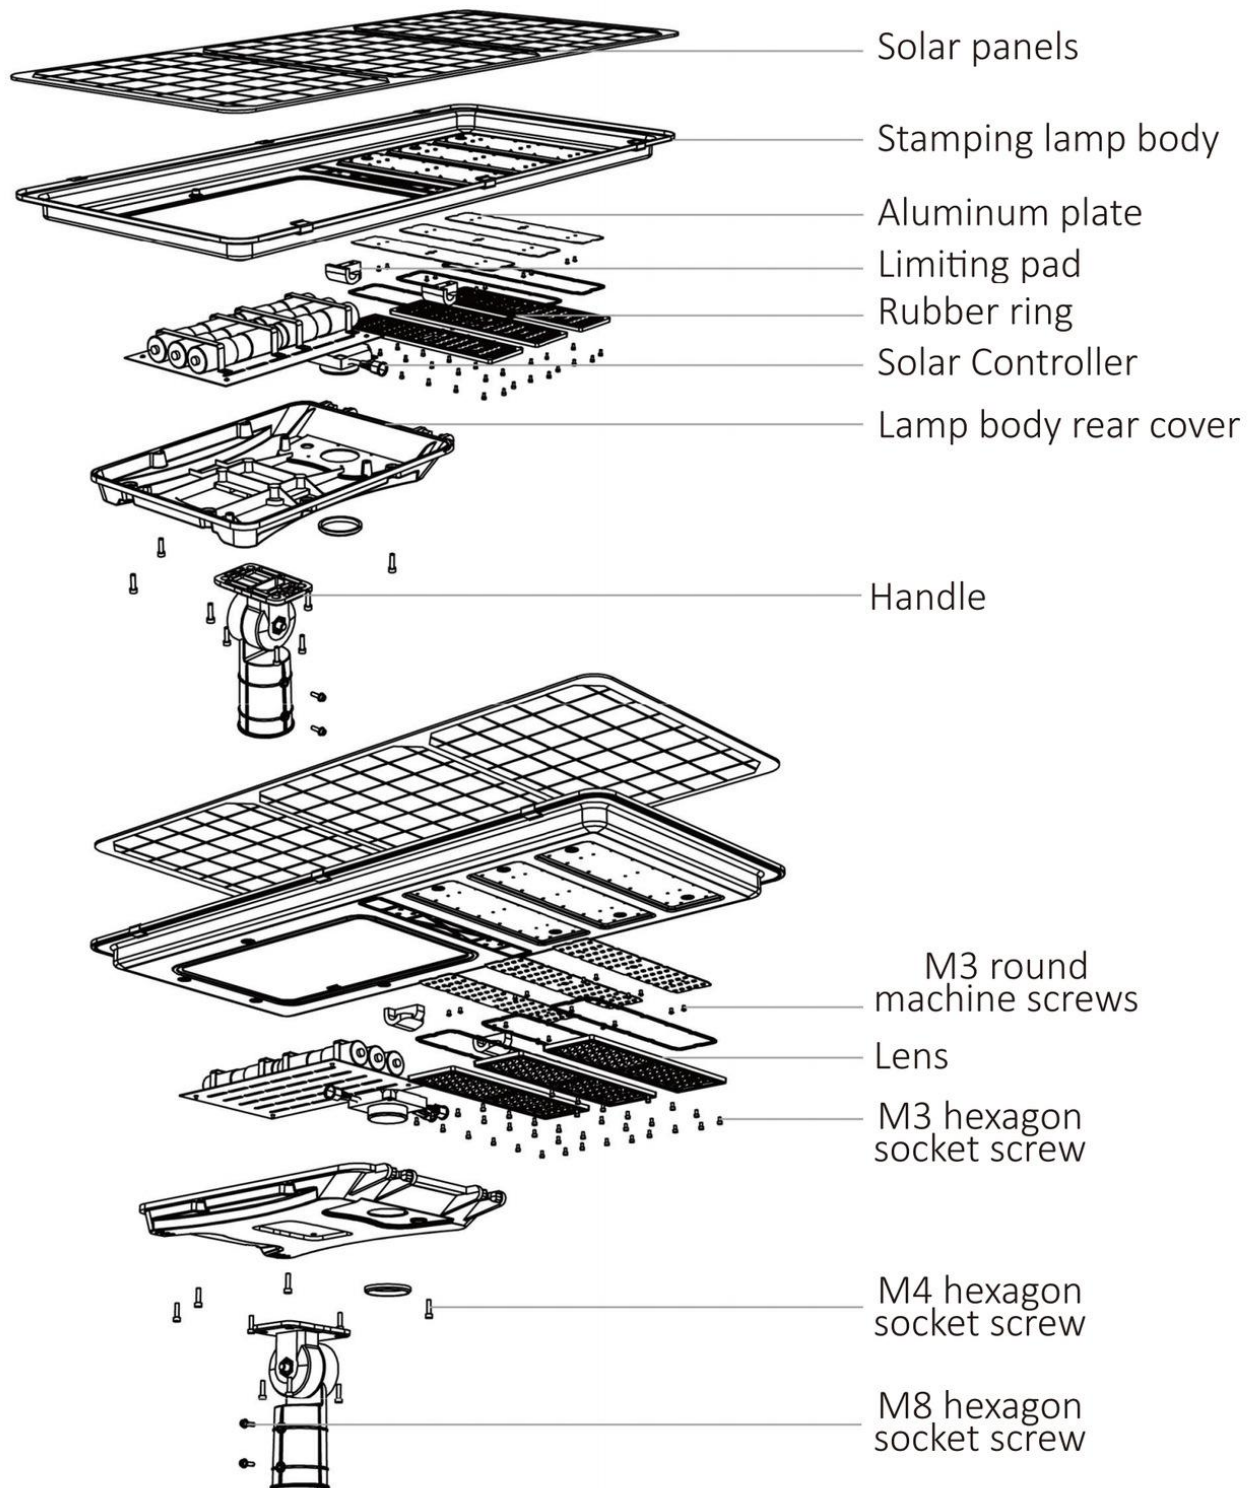


Product Details —

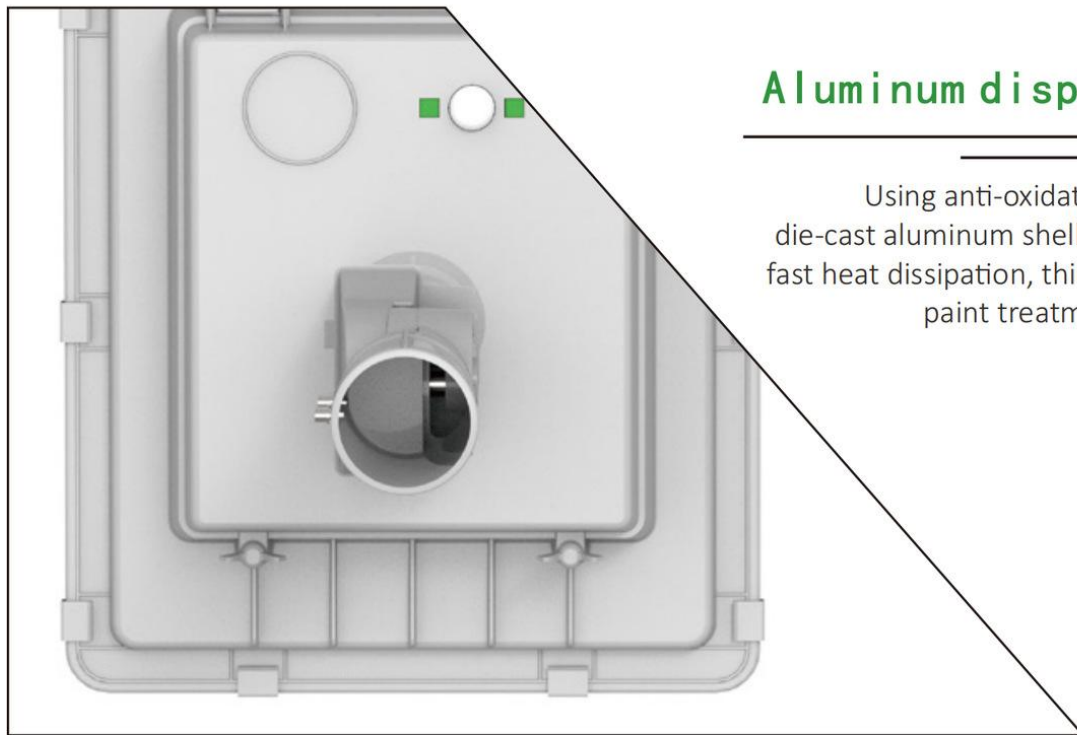

Aluminum display stand

Using anti-oxidation 6063 die-cast aluminum shell, high hardness, fast heat dissipation, thick anti-corrosion paint treatment.

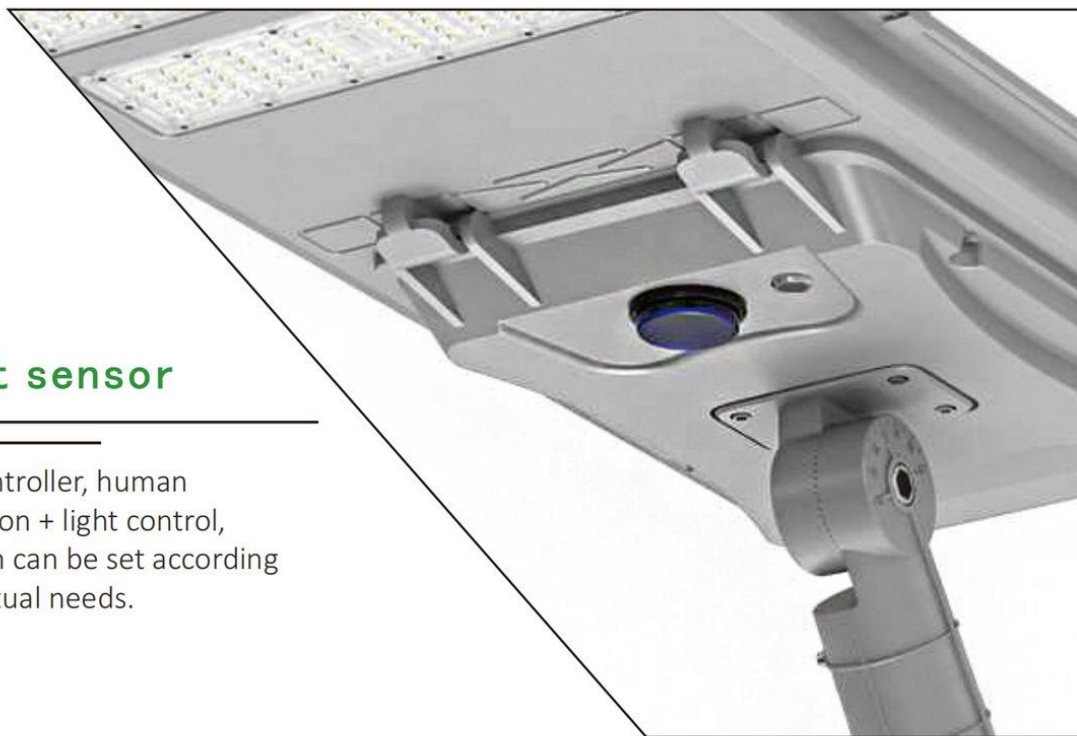

Smart sensor

MPPT controller, human body induction + light control, automatic switch can be set according to actual needs.

Product Details —




Light source chip

Using genuine Philips 2835 lamp beads, high thermal conductivity, low light decay, pure light color, no ghosting, light efficiency up to 200lm/w.

Monocrystalline solar panels

Single solar panel, high photoelectric conversion rate, fast storage speed.

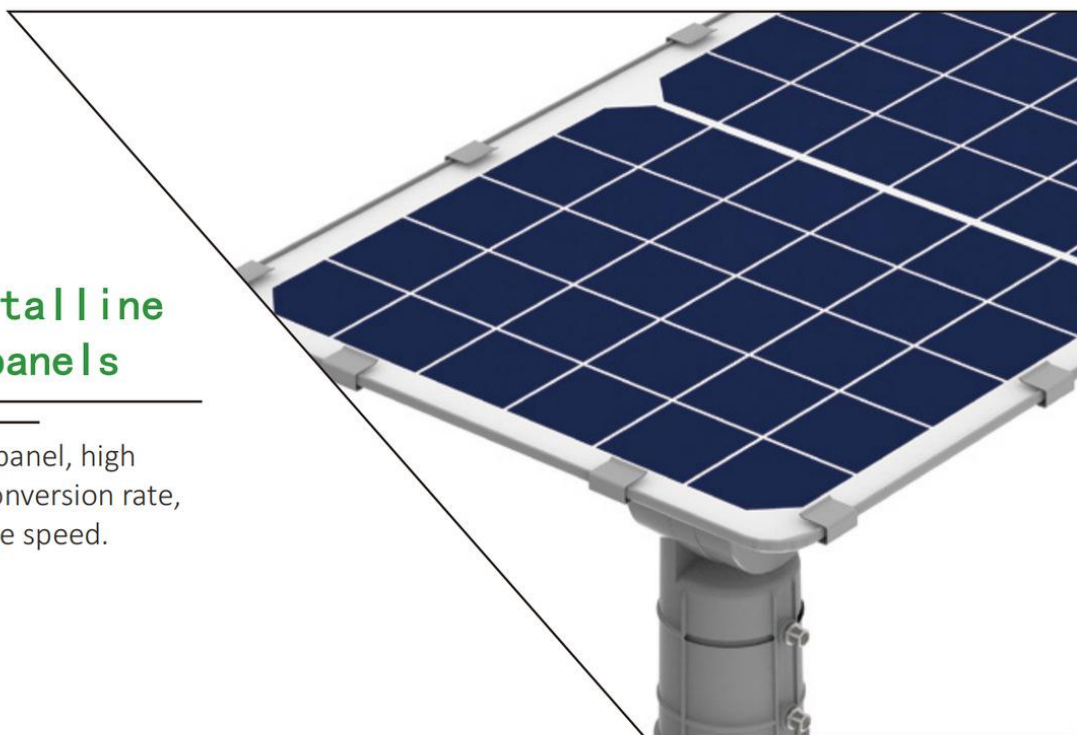


Application Scenarios —

IP65 waterproof rating, suitable for various lighting scenes: rural roads, municipal roads, highways, scenic spots, outdoor basketball courts, parks, communities, etc.



Product Packaging —

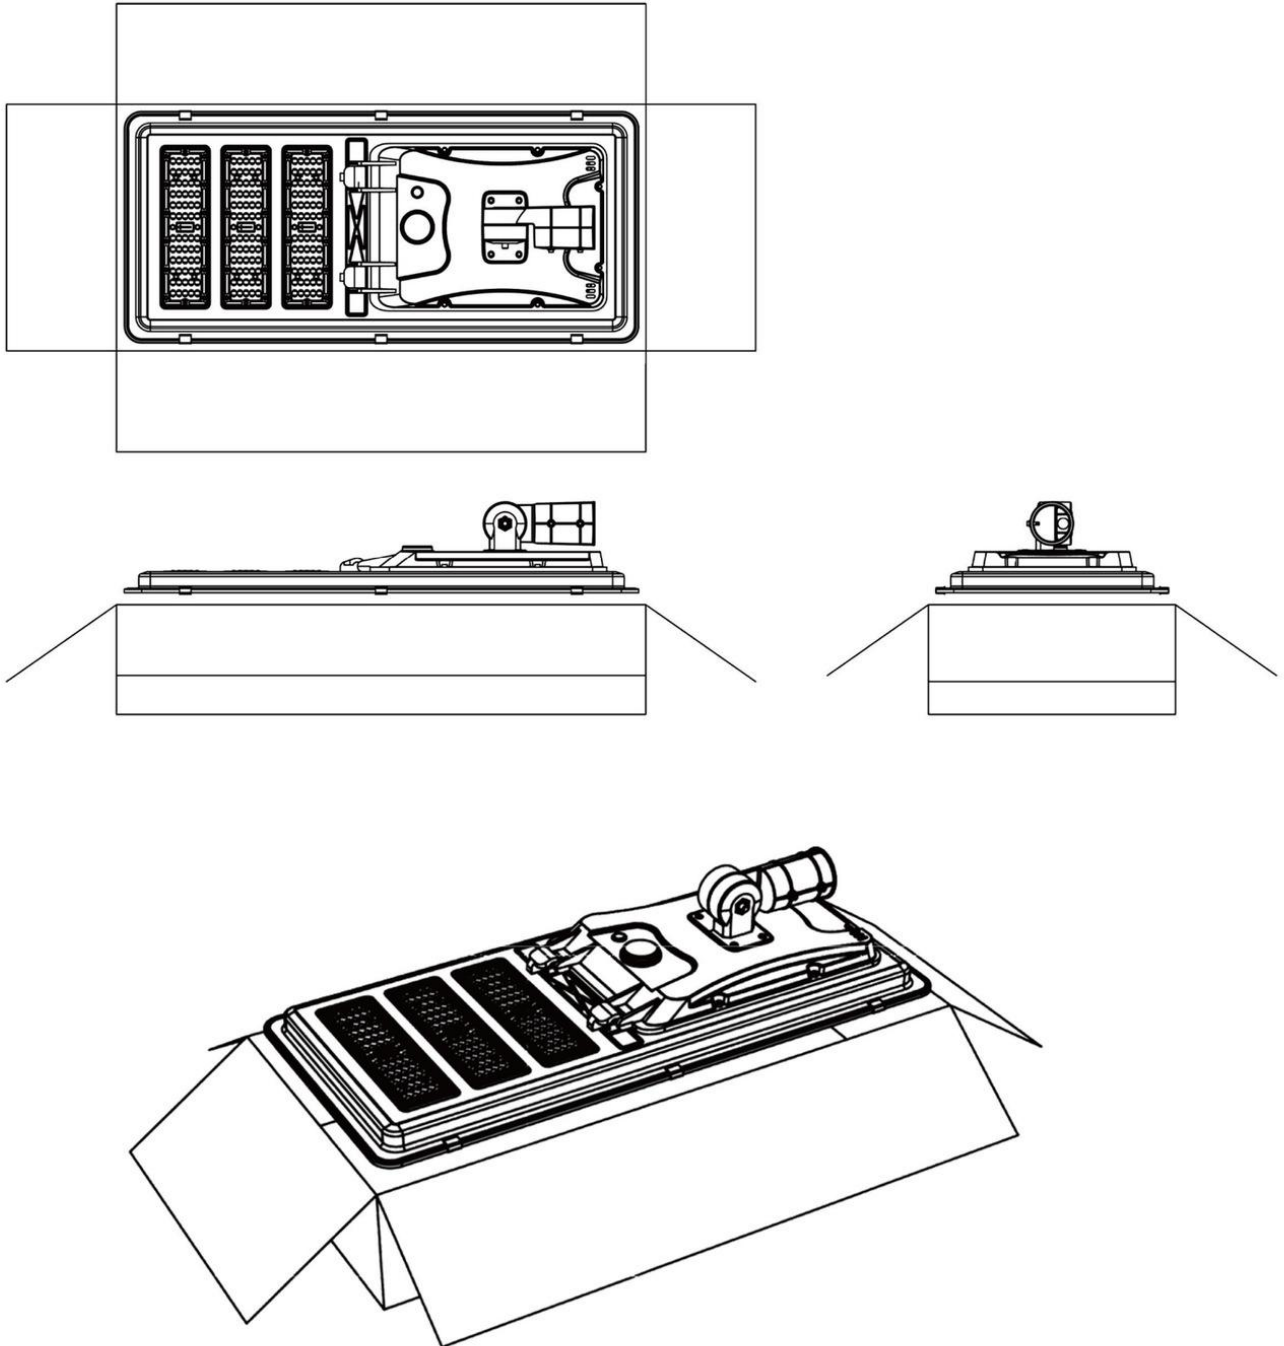

Package dimensions: 1035*450*115MM